


# VALVE REGULATED, GELLED-ELECTROLYTE BATTERY

# 8G34R

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	70Ah
Capacity at C/20	60Ah
Weight	43 Lbs. (19.3 kg)
Plate Alloy	Lead Calcium
Posts	Forged terminals & bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76; F (-60; C) ÷ 140; F (60; C)
Charge Voltage @ 68; F (20; C)	
Cycle	2.30 - 2.35 VPC
Float	2.25 - 2.30 VPC
Vent	Self-sealing (2 PSI operation)
Electrolyte	Sulfuric acid thixotropic gel
Resistance	4.0 Milliohms (full charge)
Terminal	FEM 1/4"



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A by East Penn Manufacturing


Valve-Regulated, Gelled-Electrolyte Battery



## DIMENSIONS

Length (mm)	10.19 (259 mm)
Width (mm)	6.63 (169 mm)
Height (mm)	7 (178 mm)

## Cycling Ability

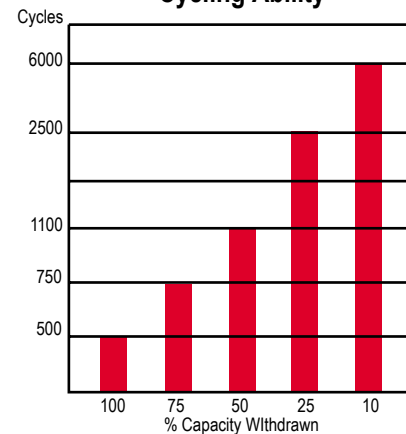

Number of cycles vs. depth of discharge at +20;C discharge with 20 hour rate

Distributed in Canada by

# EAST PENN / Power Battery

West: 1-800-363-3166 Central: 1-800-668-9303 East: 1-800-361-5935

